

P43 TRANSDUCER OF POWER NETWORK PARAMETERS

FEATURES




INPUT:



OUTPUTS:



GALVANIC ISOLATION:



Export department:


English: +48 68 32 95
302 / 321 / 276 / 386 / 233
German: +48 68 32 95 305
French: +48 68 32 95 304
Russian: +48 68 32 95 321
Fax: +48 68 32 54 091
e-mail: export@lumel.com.pl

LUMEL S.A.
ul. Sulechowska 1
65-022 Zielona Góra
POLAND
WWW.LUMEL.COM.PL



- Measurement and conversion of power network parameters in 3 or 4-wire balanced or unbalanced systems.
- Tetraquadrantic energy measurement (Ep+, Ep-, EQL, EQc).
- Measurement of 15, 30 or 60 minutes' mean active power (synchronization by an internal clock or a walking window) with the archiving function of 1000 last samples.
- Programmable current and voltage transformer ratios.
- Programmable parameters through the RS-485 interface or USB when using the free LPCon program.
- RS-485 communication interface with MODBUS protocol.
- Detection and signalling of incorrect phase sequence.

EXAMPLE OF APPLICATION

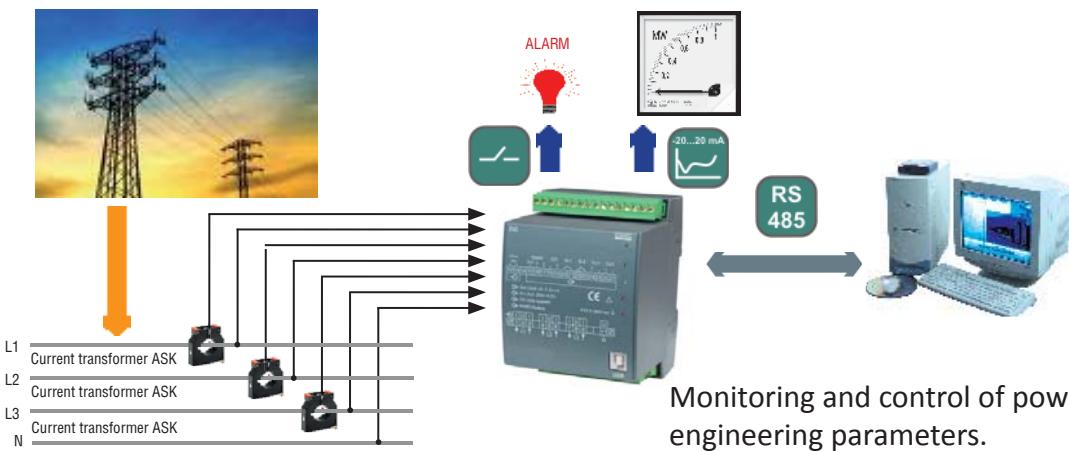

Monitoring and control of power engineering parameters.

MEASURED QUANTITIES AND MEASURING RANGES

Measured value	Measuring range	L1	L2	L3	Σ	Basic error
Current 1/5A L1...L3	0.02...6 A a.c.*	●	●	●		±0.2%
Voltage L-N	2.9...276 V a.c.*	●	●	●		±0.2%
Voltage L-L	10...480 V a.c.*	●	●	●		±0.5%
Frequency	45.0...100.0 Hz	●	●	●		±0.2%
Active power	-1.65 kW...1.4 W...1.65 kW*	●	●	●	●	±0.5%
Reactive power	-1.65 kvar...1.4 var...1.65 kvar*	●	●	●	●	±0.5%
Apparent power	1.4 VA...1.65 kVA*	●	●	●	●	±0.5%
Tangens ϕ	-1.2...0...1.2	●	●	●	●	±1%
Power factor PF	-1...0...1	●	●	●	●	±0.5%
Angle between U and I	-180° ... 180°	●	●	●		±0.5%
Input active energy	0 ... 99 999 999.9 kWh*				●	±0.5%
Output reactive energy	0 ... 99 999 999.9 kvarh*				●	±0.5%
Inductive reactive energy	0...99 999 999.9 kWh*				●	±0.5%
Capacitive reactive energy	0...99 999 999.9 kvarh*				●	±0.5%

* - for ratio Ki=Ku=1. Current ratio Ki programmable in the range 1...1000. Voltage ratio Ku programmable in the range 1...4000

OUTPUTS

Type of output	Properties
Relay output	2 relays, voltageless NO contacts, load: 250 V a.c./ 0.5 A a.c.
Impulse energy output	O/C passive, acc. to EN 62053-31, impuls constant: 5000 imp/kWh, independent on Ki, Ku ratio settings
Analog output	2 programmable outputs: -20...0..20 mA, $R_{load} = 0...500 \Omega$, accuracy 0.2%

DIGITAL INTERFACE

Type of interface	Transmission protocol	Mode	Rate
RS-485 Modbus	MODBUS RTU	8N2, 8E1, 8O1, 8N1	4.8; 9.6; 19.2; kbit/s
USB 1.1 / 2.0	MODBUS RTU	8N2	9.6 kbit/s

EXTERNAL FEATURES																																																																																																														
Overall dimensions	96 × 120 × 100 mm	fixing on a 35mm DIN rail																																																																																																												
Weight	0.3 kg																																																																																																													
Protection grade	for casing: IP40	for terminals: IP10																																																																																																												
RATED OPERATING CONDITIONS																																																																																																														
Supply voltage	85 .. 253 V a.c. (40 .. 400 Hz) or d.c. or 20 .. 40 V a.c. (40 .. 400 Hz) or d.c.	Power input ≤ 6 VA																																																																																																												
Power input	in voltage circuit ≤ 0.05 VA	in current circuit ≤ 0.05 VA																																																																																																												
Input signal	• 0 .. 0.005 .. 1.2 ln; 0.05 .. 1.2 Un for the measurement of current and voltage; • 0 .. 0.1 .. 1.2 ln; 0 .. 0.1 .. 1.2 Un or the measurement of coefficients P_{fi} , $\text{tg}\phi_i$	• signal frequency 45 .. 66 .. 100 Hz • sinusoidal signal (THD ≤ 8%)																																																																																																												
Power factor	-1 .. 0 .. 1																																																																																																													
Analog outputs	-24 .. -20 .. 0 .. 20 .. 24 mA																																																																																																													
Temperature	ambient: -10...23..55°C	storage: -30...70°C																																																																																																												
Humidity	25 .. 95%	inadmissible condensation																																																																																																												
Additional error (in % of the intrinsic error)	from output signals frequency < 50%	from ambient temperature changes < 50% / 10%																																																																																																												
Operating position	any																																																																																																													
External magnetic field	0 .. 400 A/m																																																																																																													
Short duration overload (5 s)	voltage input: 2 Un (max. 1000 V)	current input: 10 ln																																																																																																												
Admissible peak factor	current intensity: 2	voltage: 2																																																																																																												
SAFETY AND COMPATIBILITY REQUIREMENTS																																																																																																														
Electromagnetic compatibility	noise immunity noise emissions	acc. to EN 61000-6-2 acc. to EN 61000-6-4																																																																																																												
Isolation between circuits	basic	acc. to EN 61010-1																																																																																																												
Pollution level	2																																																																																																													
Installation category	III	acc. to EN 61010-1																																																																																																												
Maximal phase-to-earth voltage	600 V																																																																																																													
Altitude a.s.l.	< 2000 m																																																																																																													
ADDITIONAL ERRORS IN % OF THE INTRINSEC ERROR																																																																																																														
From frequency of input signals	< 50%																																																																																																													
From ambient temperature changes	< 50% / 10%																																																																																																													
For THD > 8%	< 100%																																																																																																													
CONNECTION DIAGRAM																																																																																																														
<p>Fig. 1 Exemplary connection diagram for 4-wire network.</p>																																																																																																														
ORDERING																																																																																																														
<table border="1"> <tr> <td>P43 -</td> <td>X</td> <td>X</td> <td>X</td> <td>XX</td> <td>X</td> </tr> <tr> <td>Input current:</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>1 A (X/1)</td> <td>1</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>5 A (X/5)</td> <td>2</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Input voltage(phase/phase-to-phase)</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Un:</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>3 x 57.7 / 100 V</td> <td>1</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>3 x 230 / 400 V</td> <td>2</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Supply voltage:</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>85..253 V d.c./a.c.</td> <td></td> <td>1</td> <td></td> <td></td> <td></td> </tr> <tr> <td>20..40 V d.c./a.c.</td> <td></td> <td>2</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Version:</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>standard</td> <td></td> <td>00</td> <td></td> <td></td> <td></td> </tr> <tr> <td>custom-made*</td> <td></td> <td>XX</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Acceptance tests:</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>without extra quality requirements</td> <td></td> <td>8</td> <td></td> <td></td> <td></td> </tr> <tr> <td>with an extra quality inspection certificate</td> <td></td> <td>7</td> <td></td> <td></td> <td></td> </tr> <tr> <td>according to customer's request*</td> <td></td> <td>X</td> <td></td> <td></td> <td></td> </tr> </table>			P43 -	X	X	X	XX	X	Input current:						1 A (X/1)	1					5 A (X/5)	2					Input voltage(phase/phase-to-phase)						Un:						3 x 57.7 / 100 V	1					3 x 230 / 400 V	2					Supply voltage:						85..253 V d.c./a.c.		1				20..40 V d.c./a.c.		2				Version:						standard		00				custom-made*		XX				Acceptance tests:						without extra quality requirements		8				with an extra quality inspection certificate		7				according to customer's request*		X			
P43 -	X	X	X	XX	X																																																																																																									
Input current:																																																																																																														
1 A (X/1)	1																																																																																																													
5 A (X/5)	2																																																																																																													
Input voltage(phase/phase-to-phase)																																																																																																														
Un:																																																																																																														
3 x 57.7 / 100 V	1																																																																																																													
3 x 230 / 400 V	2																																																																																																													
Supply voltage:																																																																																																														
85..253 V d.c./a.c.		1																																																																																																												
20..40 V d.c./a.c.		2																																																																																																												
Version:																																																																																																														
standard		00																																																																																																												
custom-made*		XX																																																																																																												
Acceptance tests:																																																																																																														
without extra quality requirements		8																																																																																																												
with an extra quality inspection certificate		7																																																																																																												
according to customer's request*		X																																																																																																												
<p>* version code will be established by the manufacturer</p> <p>Example of order: The code: P43 - 2 2 1 00 7 means: P43 - transducer of P43 type 2 - input current: 5 A 2 - input voltage: 3 x 230/400 V 1 - supply voltage: 85..253 V d.c./a.c. 00 - standard version 7 - with an extra quality inspection certificate.</p>																																																																																																														

SEE ALSO:




Current transformers.



Analysers of network parameters ND1 .



Meter of network parameters N13.



For more information about LUMEL's products please visit our website: www.lumel.com.pl

Export department:
English: +48 68 32 95 302 / 321 / 276 / 386 / 233
German: +48 68 32 95 305
French: +48 68 32 95 304
Russian: +48 68 32 95 321
Fax: +48 68 32 54 091
e-mail: export@lumel.com.pl
LUMEL S.A.
ul. Sulechowska 1
65-022 Zielona Góra
POLAND
WWW.LUMEL.COM.PL