

Features


- Voltage / Ampere panel free setting by software
- With alarm output
- 4 LED digit display, range from -1999 to + 9999
- Sampling rate : 4.5 times/ second
- One Relay alarm output



Technical Specification

Max. Display	9999 (AC display available scaling function)
Input mode	Single-terminal input
A/D converter	Dual slope
Frequency	40~200Hz (Only for AC)
Overflow indication	"1" or "-1"
Polarity display	Only "." displayed (Only for DC)
Display	Red LED
Power Supply	AC 100~240V ±10%, 50/60Hz
Power Loss	<5VA
Insulation strength	AC 1500V 1min
Insulation impedance	DC 500V≥100MΩ
Weight	350g

Dimension

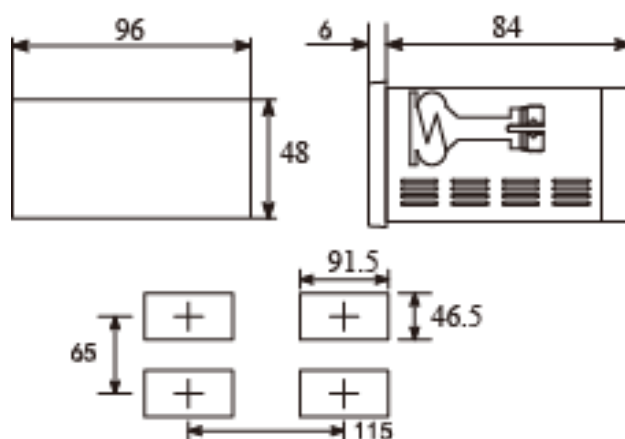

Order information

PMAC600E-N - ①

AV
AA

AC Voltage (0—600V)
AC Ampere (0-5A direct input)

Model	Range	Resolution	Input	Accuracy	Maximum Input Value
PMAC600E-NAV	600V	100uV – 1V	Direct Input	±0.5% F.S.	1000V
PMAC600E-NAA5	5A	1mA	Direct Input	±0.5% F.S.	5A

For example:

1. PMAC600E-NAV, AC voltage meter, 600V direct input, measuring range adjustable
2. PMAC600E-NAA5, AC voltage meter, 5A direct input, large then 5A, a CT should be used

Zhuhai Pilot Technology Co., Ltd.

Add: No. 15, Keji 6 Road, Chuangxin Hai'an, Tangjia Hi-tech Zone, Zhuhai, Guangdong, China
 Post Code: 519085
 Tel: +86 756 3629687/ 3629673
 Fax: +86 756 3629600/ 3629700
 Email: overseamarket@pmac.com.cn
 http://en.pmac.com.cn



Your representative